

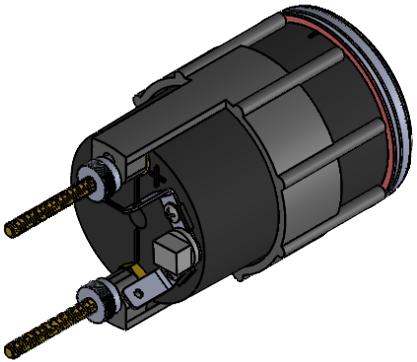


REVISIONS				
REV.	DESCRIPTION	ECN	DATE	BY
A	Update for Final Design Proposal	-	4/18/2023	DPL




Final Draft of X-23 Wall Thickness Requirements

Max Wall thickness 2"
(Cut off leg)

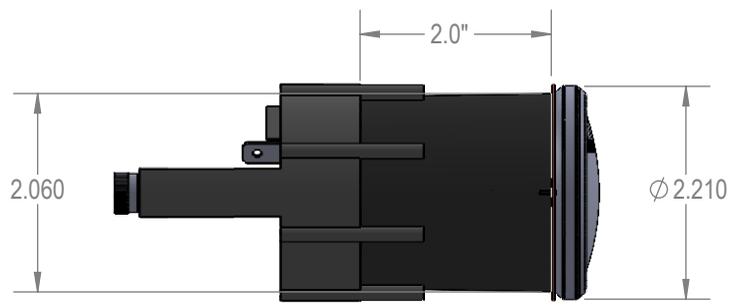

For Walls Thicker then 1.25 you will need to cut off the Legs
For wall thinner than .250" A Spacer in necessary

Min Wall Thickness 1/4"

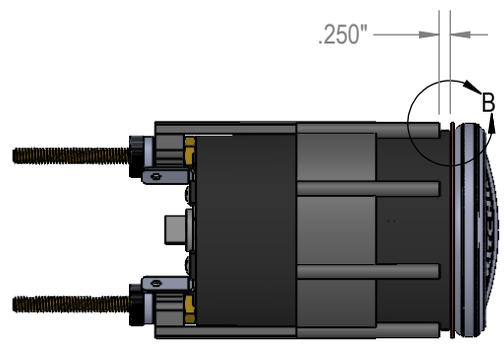

Spacer Requirements
(Spacer Thickness + Wall Thickness) Should be greater than .250."
Spacer ID should be 2 1/16"
Spacer OD is Recommended at 2.5" but larger will work if you have room.

Page 1 of 1	Material: Finish:	RITCHIE E. S. RITCHIE & SONS, INC. PEMBROKE, MA 02359 www.ritchienavigation.com		Title:		Drawing # X-23 wall req	
TOLERANCES UNLESS SPECIFIED: DECIMALS .XX ±0.02" .XXX ±0.005"				Sheet Size ANSI-A	Scale 1:2	Drawing Date 12/7/2022	Part # X-23
ANGLES ±1/2° FRACTIONS ±1/64"							